

# **NPN Plastic-Encapsulate**

2W Output Amplifier of Portable Radios in Class B Push-pull Operation.

#### **Features**

➤ Complimentary to SS8550

➤ Collector Current: I<sub>C</sub>=1.5A

➤ Collector Power Dissipation: P<sub>C</sub>=2W (T<sub>C</sub>=25°C)

# TO-92 E C B C E

# Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	BV <sub>CBO</sub>	40	V
Collector-Emitter Voltage	BV <sub>CEO</sub>	25	V
Emitter-Base Voltage	BV <sub>EBO</sub>	6	V
Collector Current	Ic	1.5	А
Collector Power Dissipation	Pc	1	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~+150	°C

# **Electrical Characteristics (Ta=25℃)**

Devementer	Symbol Conditions	Conditions	Value			I Imit
Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Collector-base breakdown voltage	BV <sub>CBO</sub>	$I_C = 100 \mu A$ , $I_E = 0$	40			V
Collector-emitter breakdown voltage	BV <sub>CEO</sub>	$I_C = 1 \text{mA}, I_B = 0$	25			V
Emitter-base breakdown voltage	BV <sub>EBO</sub>	$I_E = 100 \mu A, I_C = 0$	6			V
Collector cut-off current	I <sub>CBO</sub>	$V_{CB} = 35V, I_{E} = 0$			0.1	μΑ
Emitter cut-off current	I <sub>EBO</sub>	$V_{EB} = 6V, I_{C} = 0$			0.1	μΑ
	h <sub>FE1</sub>	$V_{CE} = 1V$ , $I_{C} = 5m$	45			
DC current gain	h <sub>FE2</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 100mA	85		300	
	h <sub>FE3</sub>	V <sub>CE</sub> = 1V, I <sub>C</sub> = 800mA	40			
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	$I_{C} = 500 \text{mA}, I_{B} = 50 \text{mA}$			0.6	V
base -emitter saturation voltage	V <sub>BE(sat)</sub>	$I_C = 500 \text{mA}, I_B = 50 \text{mA}$			1.2	V
Transition frequency	f <sub>T</sub>	$V_{CE} = 6V$ , $I_B = 20mA$	100			MHz

#### h<sub>FE2</sub> Classification

Classification	В	С	D
Range	85-160	120-200	160-320



#### **Typical Characteristics**

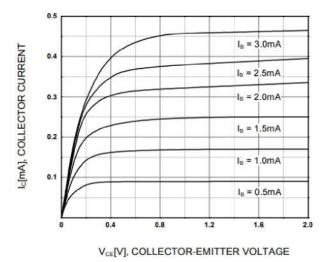


Figure 1. Static Characteristic

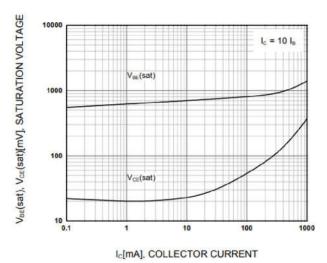


Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

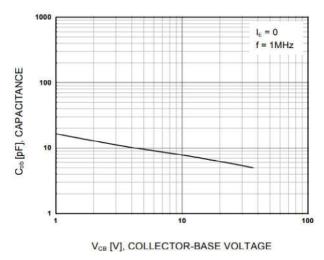


Figure 5. Collector Output Capacitance

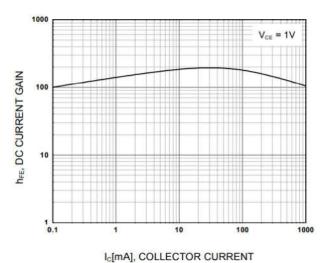


Figure 2. DC current Gain

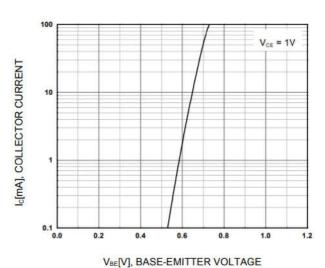


Figure 4. Base-Emitter On Voltage

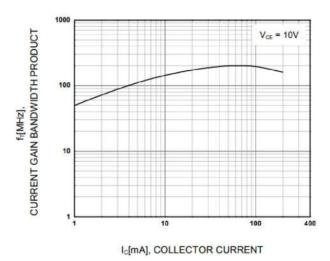


Figure 6. Current Gain Bandwidth Product




# **Ordering information**

Package	Packing Description	Base Quantity
TO-92	Bulk	1000pcs/Bag
	Tape	2000pcs/Box

# **Package Dimensions**

#### **TO-92**

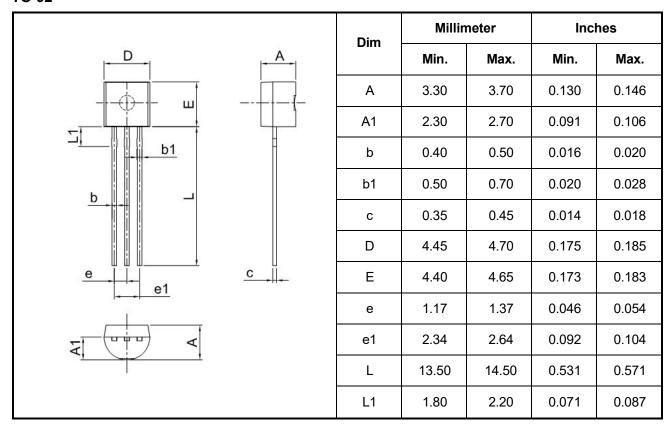



# **Disclaimer**

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <a href="https://www.yfwdiode.com">https://www.yfwdiode.com</a>, or consult YFW sales office for further assistance.