

1200V N-Channel Silicon Carbide Power MOSFET

MAIN CHARACTERISTICS


I_D	30A
V_{DSS}	1200V
R_{DS(on)-typ}(@V_{GS}=10V)	<110mΩ(Typ:80mΩ)

APPLICATIONS

- ♦Solar Inverters
- ♦Switch Mode Power Supplies
- ♦High Voltage DC/DC Converters
- ♦Battery Chargers

FEATURES

- ♦High Blocking Voltage with Low On-Resistance
- ♦High Speed Switching with Low Capacitances
- ♦Easy to Parallel and Simple to Drive
- ♦Avalanche Ruggedness

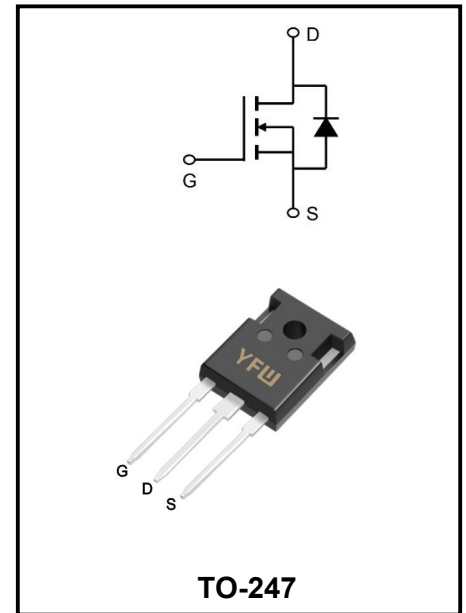

Maximum Ratings at T_c=25°C unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	1200	V
Gate - Source Voltage Absolute maximum values	V_{GS}	-10 / +25	V
Gate source voltage Recommended operational values	V_{GSop}	-5 / +20	V
Continue Drain Current V _{GS} =0, T _C =25 °C V _{GS} =20V, T _C =100 °C	I_D	30 22	A
Pulsed Drain Current Pulse width tp limited by Tmax	I_{DM}	80	A
Power Dissipation T _C =25 °C T _C =100 °C	P_D	178 89	W
Peak diode recovery dv/dt	dv/dt	4.5	W/ns
Operating Temperature Range	T_J	-55 to +175	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C
Thermal Resistance, Junction to Case	R_{θJC}	0.8	°C/W
Thermal Resistance, Junction to Ambient	R_{θJA}	40	°C/W

Electrical Characteristics at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	BV_{DSS}	1200	-	-	V
Drain-Source Leakage Current	$V_{DS}=1200V, V_{GS}=0V$	I_{DSS}	-	-	100	μA
Gate Leakage Current	$V_{DS}=0V, V_{GS}=+20V/-10V$	I_{GSS}			± 1	nA
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=5mA$	$V_{GS(th)}$	2	-	4	V
	$V_{DS}=V_{GS}, I_D=5mA, T_J=150^\circ C$		-	2.4	-	
Drain-source on-state resistance	$V_{GS}=10V, I_D=20A$	$R_{DS(on)}$	-	80	110	m Ω
Forward Transconductance	$V_{DS}=20V, I_D=20A$	gfs	-	13	-	S
Input Capacitance	$V_{DS}=1000V$ $V_{GS}=0V$ $f=1MHz$ $V_{AC}=25mV$	C_{iss}	-	1130	-	pF
Output Capacitance		C_{oss}	-	92	-	
Reverse Transfer Capacitance		C_{rss}	-	7.5	-	
Coss stored energy		E_{oss}	*	50	-	
Avalanche energy, single pluse	$V_{DD}=50V, I_D=20A$	E_{AS}	-	1	-	J
Turn-on switching energy	$V_{DS}=800V, V_{GS}=-5/+20V$ $I_D=20A, R_{G(ext)}=2.5\Omega, L=156\mu H$	E_{on}	-	523	-	μJ
Turn off switching energy		E_{off}	-	72	-	μJ
Turn-on Delay Time	$V_{DS}=800V, V_{GS}=-5/+20V$ $I_D=20A, R_{G(ext)}=2.5\Omega,$ $R_L=40\Omega$	$t_{d(on)}$	-	15	-	ns
Rise Time		T_r	-	22	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	24	-	
Fall Time		t_f	-	14	-	
Internal gate resistance	$f=1MHz, V_{AC}=25mV$	R_G	-	3.9	-	Ω
Total Gate Charge	$V_{DS}=800V, V_{GS}=-5/+20V$ $I_D=20A$	Q_g	-	17	-	nC
Gate to Source Charge		Q_{gs}	-	29	-	
Gate to Source Charge		Q_{gd}	-	71	-	
Diode forward voltage	$V_{GS}=-5V, I_{SD}=10A$	V_{SD}	-	4.3	-	V
	$V_{GS}=-5V, I_{SD}=10A, T_J=150^\circ C.$		-	3.8	-	
Diode forward current	$T_C=25^\circ C$	I_S	-	-	30	A
Reverse recovery time	$V_{GS}=-5V, I_{SD}=20A,$ $V_R=800V$ $di_f/dt=1950A/\mu s$	trr	-	24	-	nS
Reverse recovery charge		Q_{rr}	-	152	-	μC
Peak reverse recovery current		I_{rrm}	-	10	-	A

Note (1): When using SiC Body Diode the maximum recommended $V_{GS} = -5V$

Typical Characteristics

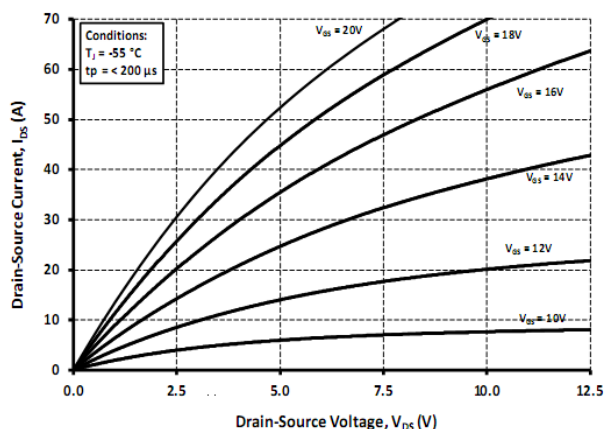


Figure 1. Output Characteristics $T_j = -55\text{ }^{\circ}\text{C}$

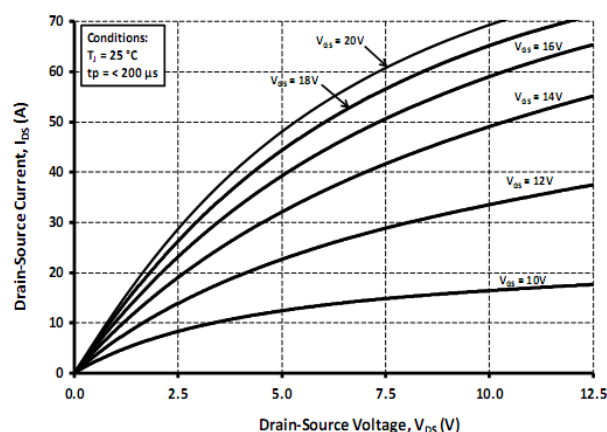


Figure 2 .Output Characteristics $T_j = 25\text{ }^{\circ}\text{C}$

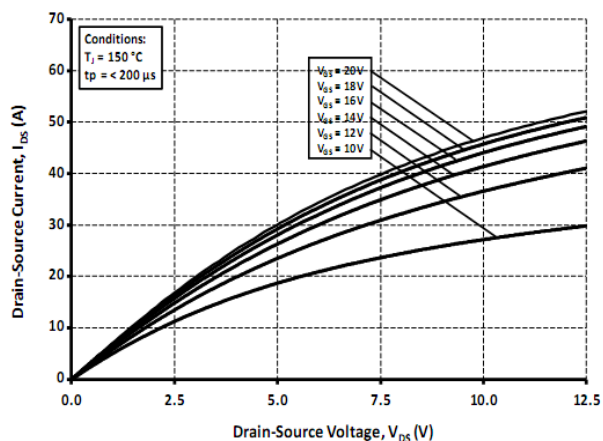


Figure 2 .Output Characteristics $T_j = 25\text{ }^{\circ}\text{C}$

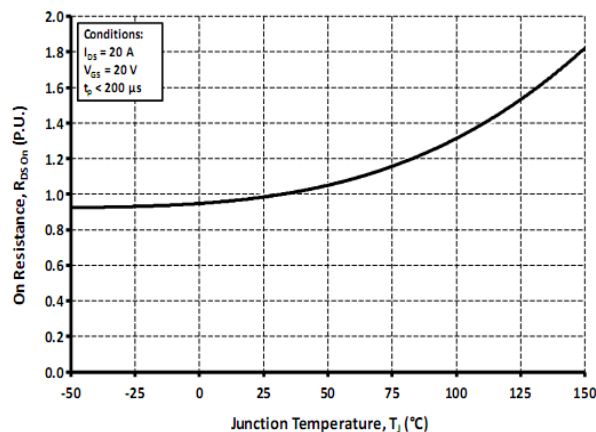


Figure 4. Normalized On-Resistance vs. Temperature

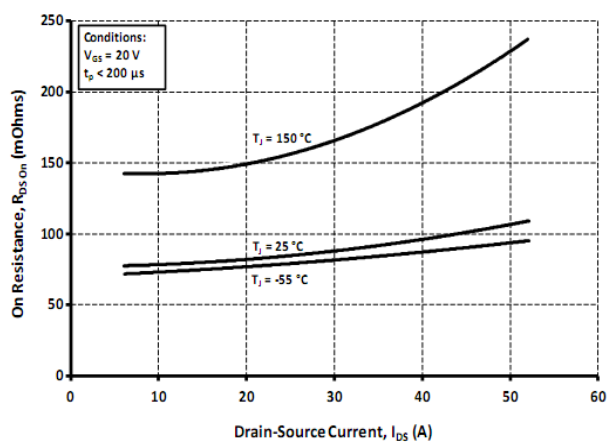


Figure 5. On-Resistance vs. Drain Current For Various Temperatures

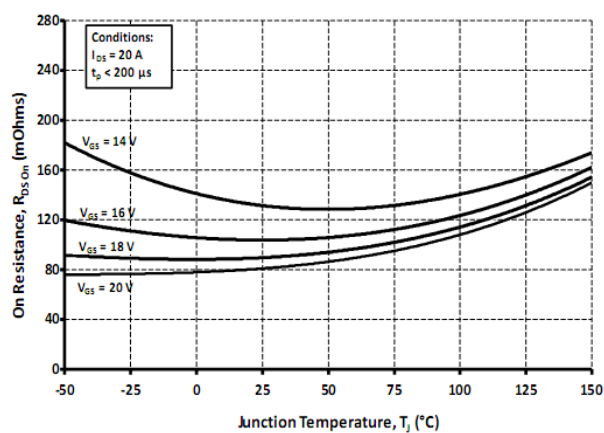


Figure 6. On-Resistance vs. Temperature For Various Gate Voltage

Typical Characteristics (Continued)

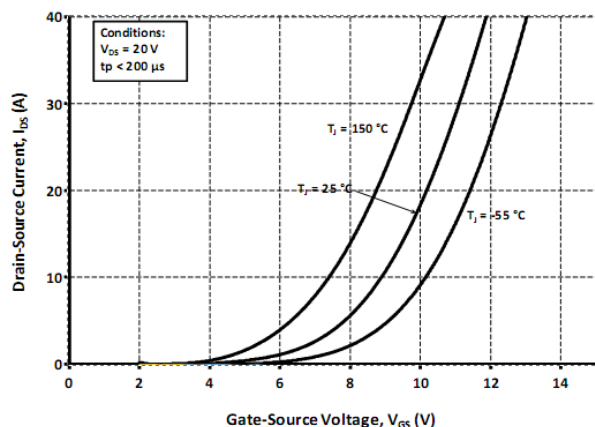


Figure 7. Transfer Characteristic for Various Junction Temperatures

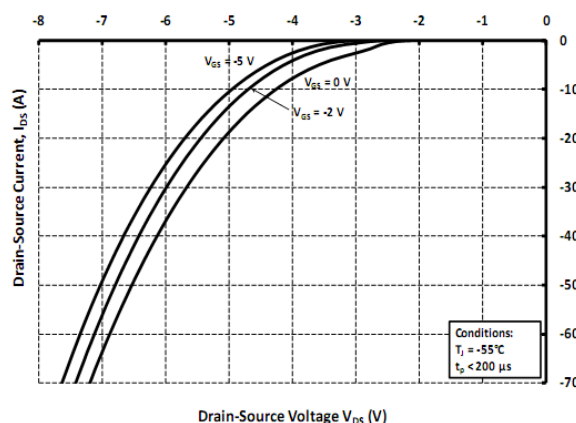


Figure 8. Body Diode Characteristic at -55 °C

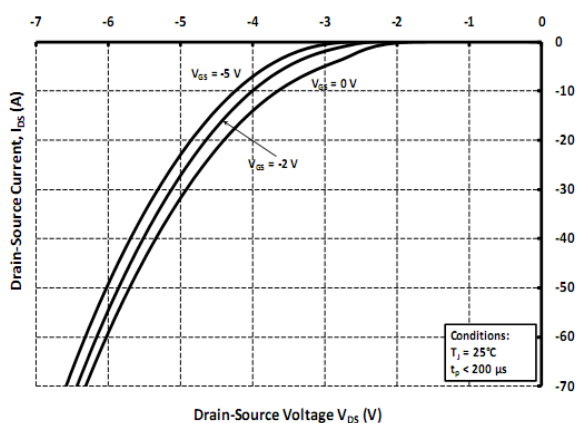


Figure 9. Body Diode Characteristic at 25 °C

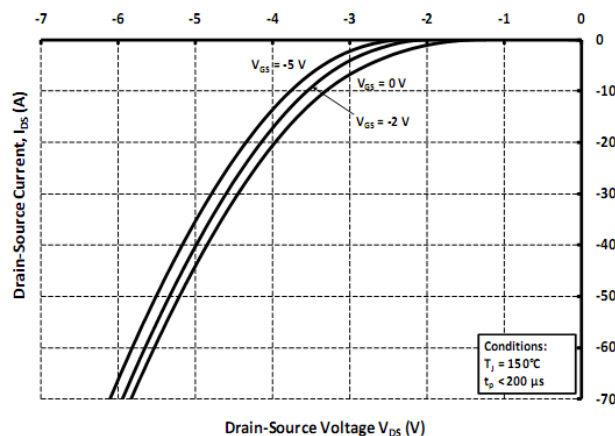


Figure 10. Body Diode Characteristic at 150 °C

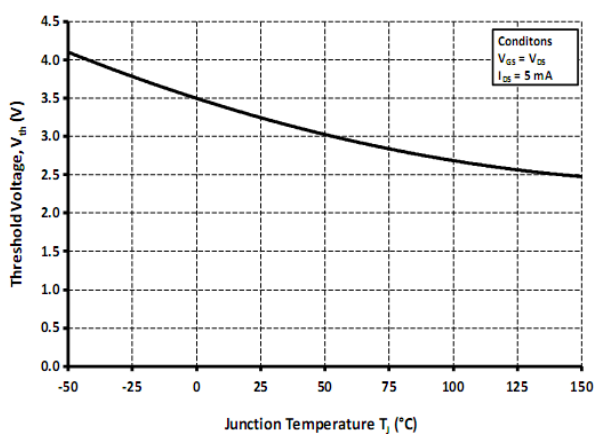


Figure 11. Threshold Voltage vs. Temperature

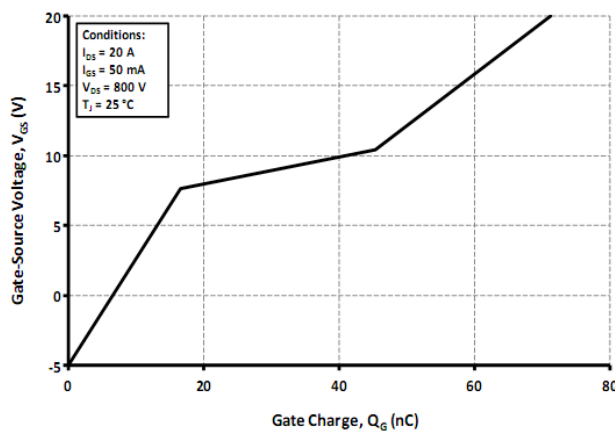


Figure 12. Gate Charge Characteristics

Typical Characteristics (Continued)

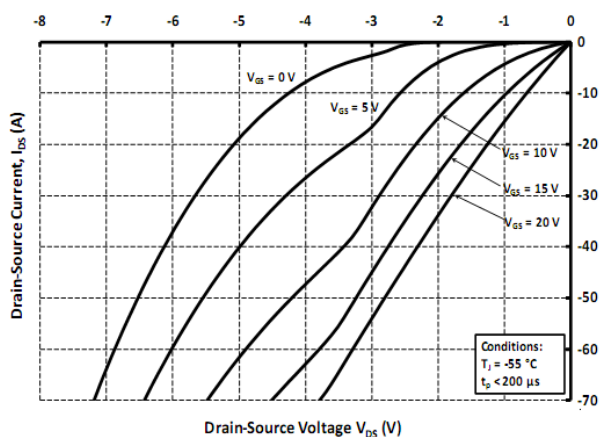


Figure 13. 3rd Quadrant Characteristic at -55 °C

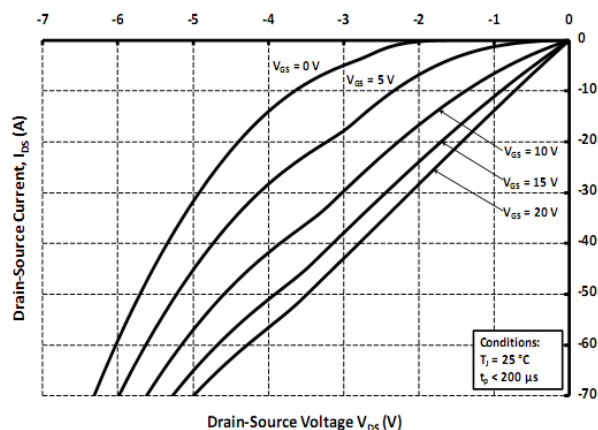


Figure 14. 3rd Quadrant Characteristic at 25 °C

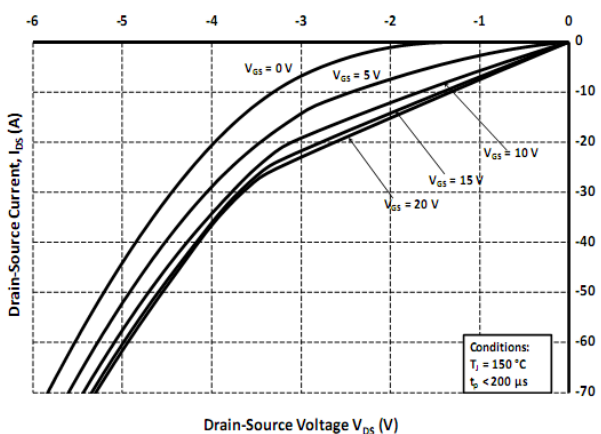


Figure 15. 3rd Quadrant Characteristic at 150 °C

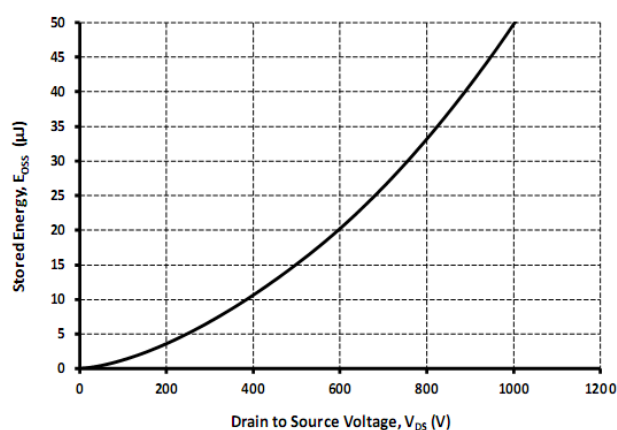


Figure 16. Output Capacitor Stored Energy

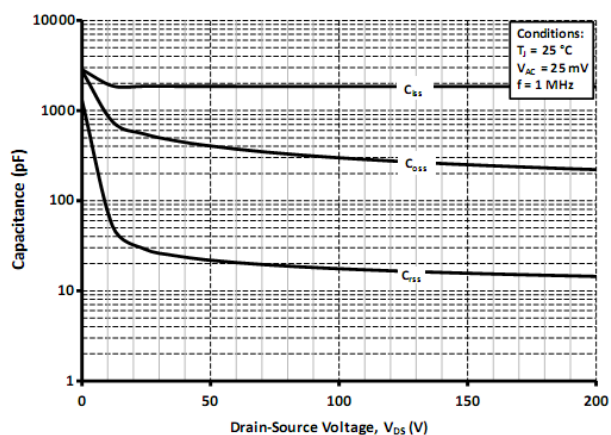


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 200V)


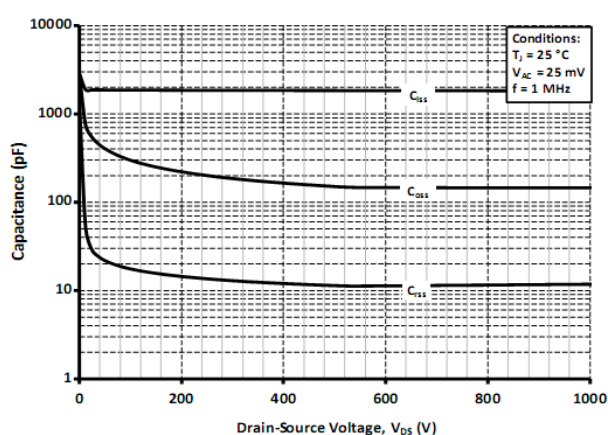


Figure 18. Capacitances vs. Drain-Source Voltage (0 - 1000V)

Marking Diagram

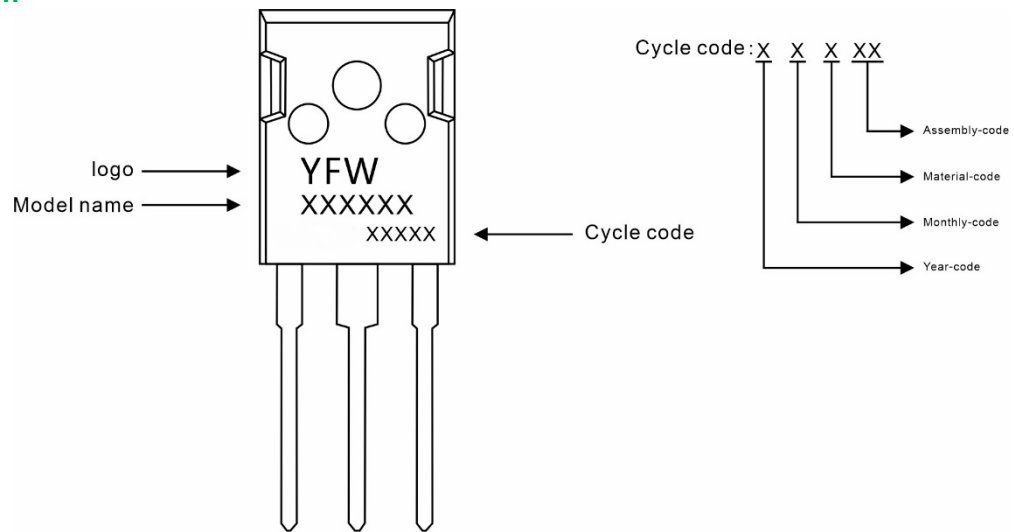

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFWM330120PT	TO-247	0.209oz(5.93g)	30pcs/tube	600PCS/Box 2400PCS/Carton

Package Dimensions

TO-247

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
A	4.90	5.10	0.193	0.201
A1	1.90	2.10	0.075	0.083
A2	2.29	2.54	0.090	0.100
b	1.00	1.40	0.039	0.055
b1	2.00	2.20	0.079	0.087
b2	3.00	3.20	0.118	0.126
c	0.50	0.70	0.020	0.028
D	15.75	16.05	0.620	0.632
E	20.20	20.80	0.795	0.819
e	5.45 (BSC)		0.215 (BSC)	
e1	10.90 (BSC)		0.429 (BSC)	
F	6.05	6.25	0.238	0.246
F1	5.80	6.00	0.228	0.236
L	20.10	20.40	0.791	0.803
L1	4.05	4.35	0.159	0.171
Φ	3.50	3.70	0.138	0.146

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.