

Silicon Planar Zener Diodes


FEATURES

- ◆Total power dissipation: Max. 300mW.
- ◆Wide zener reverse voltage range 2.0V to 75V.
- ◆Small plastic package suitable for surface mounted design.
- ◆Tolerance approximately±2%.
- ◆Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆Case: SOD-323
- ◆Terminals: Solderable per MIL-STD-750, Method 2026
- ◆Approx. Weight: 5.48mg /0.00019oz

Pinning

1.Cathode	2.Anode
	
	
SOD-323	

Absolute Maximum Ratings And Characteristics (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	0.3	W
Forward Voltage at IF = 10 mA	V_F	0.9	V
Typical thermal resistance juncting to ambient ⁽¹⁾	R_{θJA}	417	°C/W
Operating and Storage Temperature Range	T_J, T_{stg}	-55 ~ +150	°C

(1) Thermal resistance from junction to ambient at P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper areas pads.

Fig.1 Maximum Continuous Power Derating


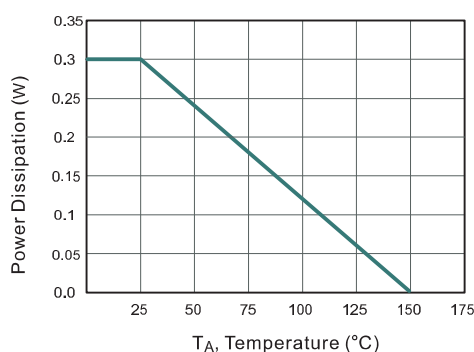


Fig.2 Typical Transient Thermal Impedance

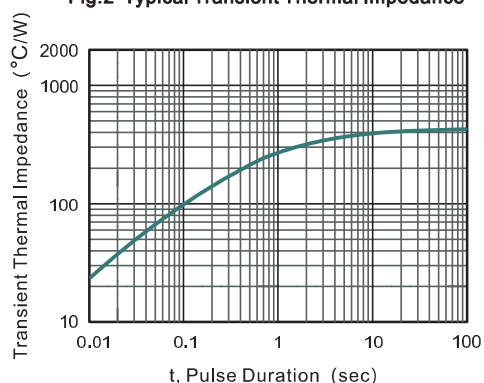

Type	Marking	Zener Voltage Range (1)			I _{ZT}	Dynamic Impedance	Reverse Current	
		V _{zt} (at I _{ZT})				Z _{zt} (at I _{ZT})	I _R	at V _R
		Min(V)	Nom (V)	Max (V)	(mA)	Max (Ω)	Max (μA)	(V)
BZT52B2V0S	0B	1.96	2.0	2.04	5	100	120	0.5
BZT52B2V2S	0C	2.16	2.2	2.24	5	100	120	0.7
BZT52B2V4S	1C	2.35	2.4	2.45	5	100	120	1
BZT52B2V7S	D1	2.65	2.7	2.75	5	110	120	1
BZT52B3V0S	E1	2.94	3	3.06	5	120	50	1
BZT52B3V3S	F1	3.23	3.3	3.37	5	130	20	1
BZT52B3V6S	H1	3.53	3.6	3.67	5	130	10	1
BZT52B3V9S	J1	3.82	3.9	3.98	5	130	5	1
BZT52B4V3S	K1	4.21	4.3	4.39	5	130	5	1
BZT52B4V7S	M1	4.61	4.7	4.79	5	130	2	1
BZT52B5V1S	N1	5	5.1	5.2	5	130	2	1.5
BZT52B5V6S	P1	5.49	5.6	5.71	5	80	1	2.5
BZT52B6V2S	R1	6.08	6.2	6.32	5	50	1	3
BZT52B6V8S	X1	6.66	6.8	6.94	5	30	0.5	3.5
BZT52B7V5S	Y1	7.35	7.5	7.65	5	30	0.5	4
BZT52B8V2S	Z1	8.04	8.2	8.36	5	30	0.5	5
BZT52B9V1S	A2	8.92	9.1	9.28	5	30	0.5	6
BZT52B10S	B2	9.8	10	10.2	5	30	0.1	7
BZT52B11S	C2	10.78	11	11.22	5	30	0.1	8
BZT52B12S	D2	11.76	12	12.24	5	35	0.1	9
BZT52B13S	E2	12.74	13	13.26	5	35	0.1	10
BZT52B15S	F2	14.7	15	15.3	5	40	0.1	11
BZT52B16S	H2	15.68	16	16.32	5	40	0.1	12
BZT52B18S	J2	17.64	18	18.36	5	45	0.1	13
BZT52B20S	K2	19.6	20	20.4	5	50	0.1	15
BZT52B22S	M2	21.56	22	22.44	5	55	0.1	17
BZT52B24S	N2	23.52	24	24.48	5	60	0.1	19
BZT52B27S	P2	26.46	27	27.54	2	70	0.1	21
BZT52B30S	R2	29.4	30	30.6	2	80	0.1	23
BZT52B33S	X2	32.34	33	33.66	2	80	0.1	25
BZT52B36S	Y2	35.28	36	36.72	2	90	0.1	27
BZT52B39S	Z2	38.22	39	39.78	2	100	0.1	30
BZT52B43S	A3	42.14	43	43.86	2	130	0.1	33
BZT52B47S	B3	46.06	47	47.94	2	150	0.1	36
BZT52B51S	C3	49.98	51	52.02	2	180	0.1	39
BZT52B56S	D3	54.88	56	57.12	2	200	0.1	43
BZT52B62S	E3	60.76	62	63.24	2	215	0.1	47
BZT52B68S	F3	66.64	68	69.36	2	240	0.1	52
BZT52B75S	H3	73.5	75	76.5	2	265	0.1	56

Ordering information


Package	Packing Description	Packing Quantity
SOD-323	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOD-323

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
C	0.08	0.15	3.1	5.9
D	1.2	1.4	47	55
E	1.4	1.8	63	70
E1	2.55	2.75	100	108
b	0.25	0.4	9.8	16
L1	0.2	0.45	7.9	16
A1	-	0.2	-	8
∠	9°			

The recommended mounting pad size

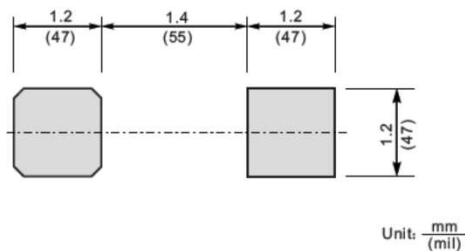

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.