


Plastic-Encapsulate Transistors

TRANSISTOR(NPN)

FEATURES

- High Voltage Application
- Telephone Application
- Complementary to MMBTA93

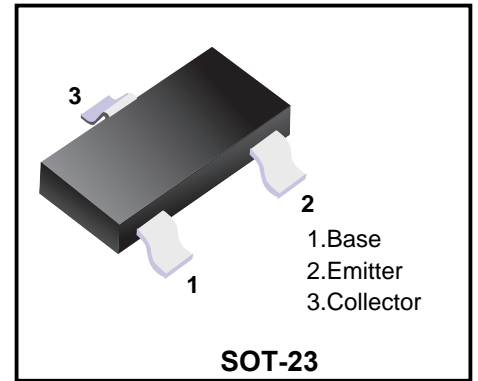

Marking Code

MMBTA43	ABX
---------	-----

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	200	V
V _{CEO}	Collector-Emitter Voltage	200	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current	500	mA
P _C	Collector Power Dissipation	350	mW
R _{θJA}	Thermal Resistance From Junction To Ambient	357	°C/W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =0.1mA, I _E =0	200			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =1mA, I _B =0	200			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =0.1mA, I _C =0	5			V
DC current gain	h _{FE(1)} *	V _{CE} =10V, I _C =10mA	40			
	h _{FE(2)} *	V _{CE} =10V, I _C =1mA	40			
	h _{FE(3)} *	V _{CE} =10V, I _C =30mA	40			
Collector-emitter saturation voltage	V _{CE(sat)} *	I _C =20mA, I _B =2mA			0.5	V
Base-emitter saturation voltage	V _{BE(sat)} *	I _C =20mA, I _B =2mA			0.9	V
Transition frequency	f _T	V _{CE} =20V, I _E =10mA, f=100MHz	50			MHz
Collector output capacitance	C _{ob}	V _{CB} =20V, I _E =0, f=1MHz			4	pF

*Pulse test: pulse width ≤300μs, duty cycle ≤ 2.0%.

Typical Characteristics

Fig. 1 Output Characteristics Curve

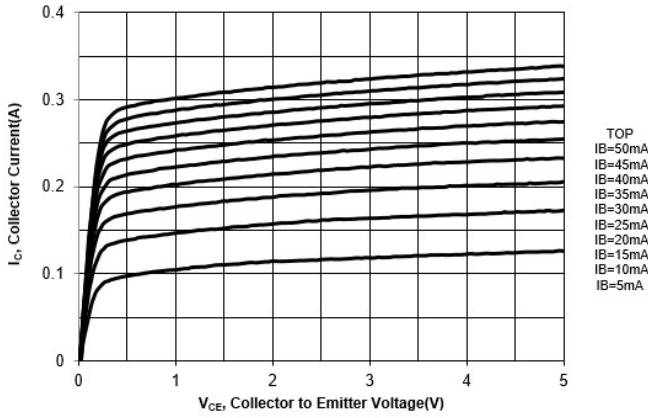


Fig. 2 Output Characteristics Curve

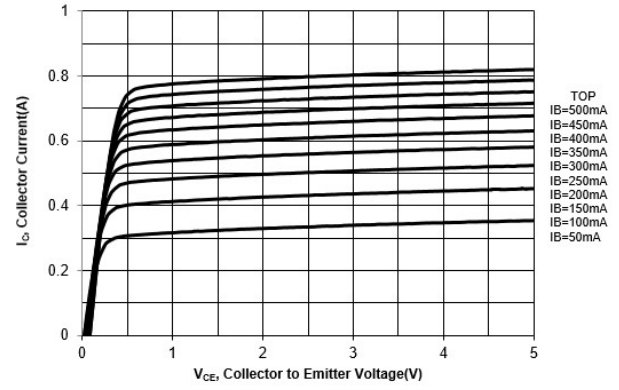


Fig. 3 Collector Current vs. V_{BE}


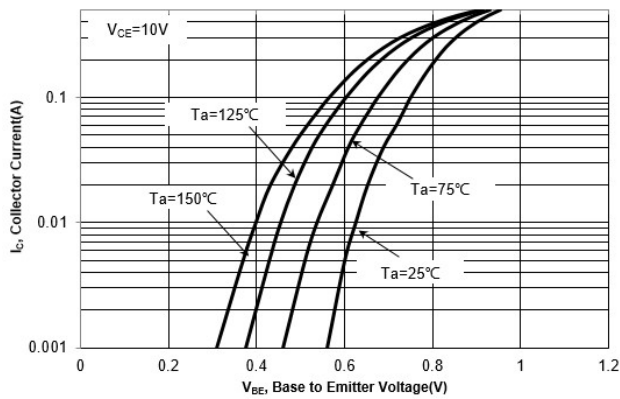


Fig. 4 h_{FE} vs. Collector Current

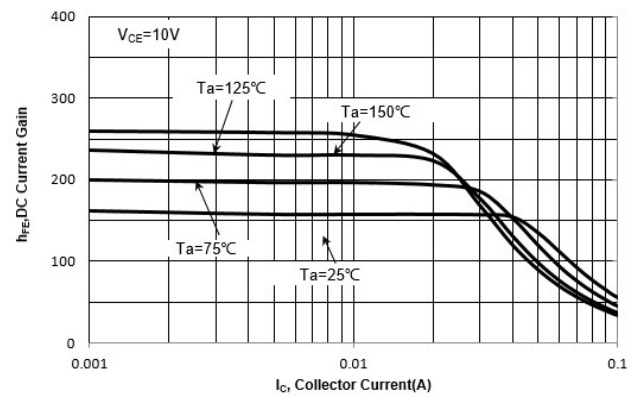

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-23	Tape/Reel,7"reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-23

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.15	35	45
A1	0.1		3.9	
bp	0.38	0.48	15	19
C	0.09	0.15	3.54	5.9
D	2.8	3.0	110	118
E	1.2	1.4	47	55
E	1.9		75	
E1	0.95		37	
HE	2.1	2.55	83	100
Lp	0.15	0.45	5.9	18
Q	0.45	0.55	18	22
v	0.2		7.9	
W	0.1		4	

The recommended mounting pad size

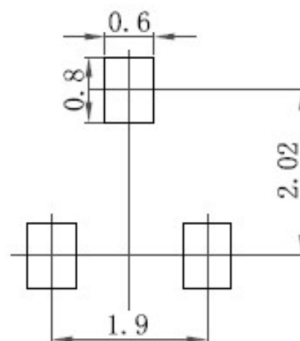

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.