

Surface Mount Zener Diode

FEATURES

- ◆ For surface mounted applications
- ◆ Low Zener impedance
- ◆ Low regulation factor
- ◆ Epoxy resin package
- ◆ RoHS Compliant


Applications

- ◆ Voltage stabilization
- ◆ Voltage regulation

MECHANICAL DATA

- ◆ Case: DO-214AB/SMC
- ◆ Lead Finish: Matte Tin
- ◆ Case Material: Epoxy Molding Compound
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 1 per J-STD-020

Pinning

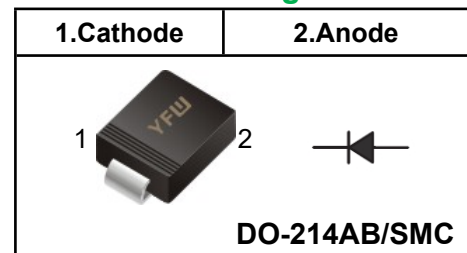

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation @ $T_L=75^{\circ}\text{C}$	P_D	5	W
Maximum Forward Voltage @ $I_F=200\text{mA}$	V_F	1.5	V
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	15	$^{\circ}\text{C/W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	220	$^{\circ}\text{C/W}$
Operating Junction Temperature and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$


Electrical Characteristics (T_A=25°C unless otherwise)

Part Number	Marking Code	Zener Voltage			Test Current	Maximum Zener Impedance			Maximum Reverse Current		Maximum Zener Current
		V _Z @ I _{ZT}			I _{ZT}	Z _{zt} @ I _{ZT}	Z _{zk} @ I _{ZK}		I _R @ V _R		I _{ZM}
		Nom (V)	Min (V)	Max (V)	mA	Ω	Ω	mA	μA	V	mA
1SMC5333B	333B	3.3	3.14	3.47	380	3	400	1	300	1	1440
1SMC5334B	334B	3.6	3.42	3.78	350	2.5	500	1	150	1	1320
1SMC5335B	335B	3.9	3.71	4.10	320	2	500	1	50	1	1220
1SMC5336B	336B	4.3	4.09	4.52	290	2	500	1	10	1	1100
1SMC5337B	337B	4.7	4.47	4.94	260	2	450	1	5	1	1010
1SMC5338B	338B	5.1	4.85	5.36	240	1.5	400	1	1	1	930
1SMC5339B	339B	5.6	5.32	5.88	220	1	400	1	1	2	865
1SMC5340B	340B	6.0	5.70	6.30	200	1	300	1	1	3	790
1SMC5341B	341B	6.2	5.89	6.51	200	1	200	1	1	3	765
1SMC5342B	342B	6.8	6.46	7.14	175	1	200	1	10	5.2	700
1SMC5343B	343B	7.5	7.13	7.88	175	1.5	200	1	10	5.7	630
1SMC5344B	344B	8.2	7.79	8.61	150	1.5	200	1	10	6.2	580
1SMC5345B	345B	8.7	8.27	9.14	150	2	200	1	10	6.6	545
1SMC5346B	346B	9.1	8.65	9.56	150	2	150	1	7.5	6.9	520
1SMC5347B	347B	10	9.50	10.5	125	2	125	1	5	7.6	475
1SMC5348B	348B	11	10.45	11.55	125	2.5	125	1	5	8.4	430
1SMC5349B	349B	12	11.4	12.6	100	2.5	125	1	2	9.1	395
1SMC5350B	350B	13	12.35	13.65	100	2.5	100	1	1	9.9	365
1SMC5351B	351B	14	13.3	14.7	100	2.5	75	1	1	10.6	340
1SMC5352B	352B	15	14.25	15.75	75	2.5	75	1	1	11.5	315
1SMC5353B	353B	16	15.2	16.8	75	2.5	75	1	1	12.2	295
1SMC5354B	354B	17	16.15	17.85	70	2.5	75	1	0.5	12.9	280
1SMC5355B	355B	18	17.1	18.9	65	2.5	75	1	0.5	13.7	264
1SMC5356B	356B	19	18.05	19.95	65	3	75	1	0.5	14.4	250
1SMC5357B	357B	20	19	21	65	3	75	1	0.5	15.2	237
1SMC5358B	358B	22	20.9	23.1	50	3.5	75	1	0.5	16.7	216
1SMC5359B	359B	24	22.8	25.2	50	3.5	100	1	0.5	18.2	198
1SMC5360B	360B	25	23.75	26.25	50	4	110	1	0.5	19	190
1SMC5361B	361B	27	25.65	28.35	50	5	120	1	0.5	20.6	176
1SMC5362B	362B	28	26.6	29.4	50	6	130	1	0.5	21.2	170
1SMC5363B	363B	30	28.5	31.5	40	8	140	1	0.5	22.8	158
1SMC5364B	364B	33	31.35	34.65	40	10	150	1	0.5	25.1	144
1SMC5365B	365B	36	34.2	37.8	30	11	160	1	0.5	27.4	132
1SMC5366B	366B	39	37.05	40.95	30	14	170	1	0.5	29.7	122
1SMC5367B	367B	43	40.85	45.15	30	20	190	1	0.5	32.7	110
1SMC5368B	368B	47	44.65	49.35	25	25	210	1	0.5	35.8	100
1SMC5369B	369B	51	48.45	53.55	25	27	230	1	0.5	38.8	93
1SMC5370B	370B	56	53.2	58.8	20	35	280	1	0.5	42.6	86
1SMC5371B	371B	60	57	63	20	40	350	1	0.5	45.5	79
1SMC5372B	372B	62	58.9	65.1	20	42	400	1	0.5	47.1	76
1SMC5373B	373B	68	64.6	71.4	20	44	500	1	0.5	51.7	70
1SMC5374B	374B	75	71.25	78.75	20	45	620	1	0.5	56	63
1SMC5375B	375B	82	77.9	86.1	15	65	720	1	0.5	62.2	58
1SMC5377B	377B	91	86.45	95.55	15	75	760	1	0.5	69.2	52.5
1SMC5378B	378B	100	95	105	12	90	800	1	0.5	76	47.5
1SMC5380B	380B	120	114	126	10	170	1150	1	0.5	91.2	39.5
1SMC5381B	381B	130	123.5	136.5	10	190	1250	1	0.5	98.8	36.6
1SMC5383B	383B	150	142.5	157.5	8	330	1500	1	0.5	114	31.6
1SMC5384B	384B	160	152	168	8	350	1650	1	0.5	122	29.4
1SMC5386B	386B	180	171	189	5	430	1750	1	0.5	137	26.4
1SMC5387B	387B	190	180.5	199.5	5	450	1850	1	0.5	144	25
1SMC5388B	388B	200	190	210	5	480	1850	1	0.5	152	23.6


The accuracy of voltage regulator is 5%

Rating And Characteristic Curves (TA=25°C unless otherwise noted)

FIG1: Maximum Continuous Power Dissipation

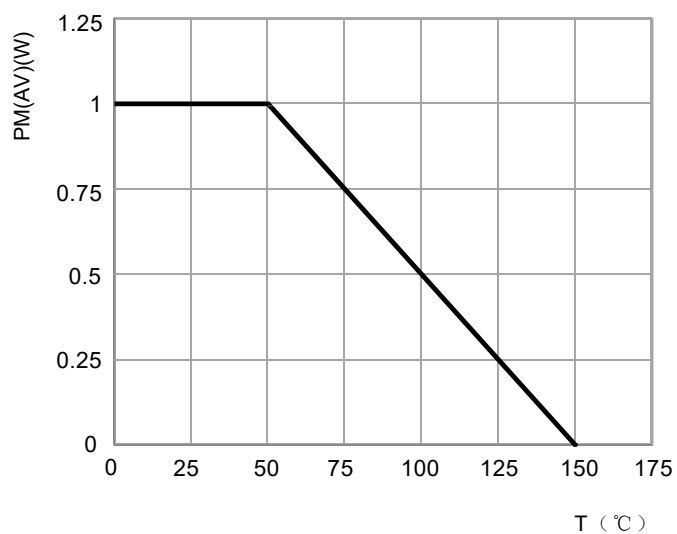

Marking Diagram

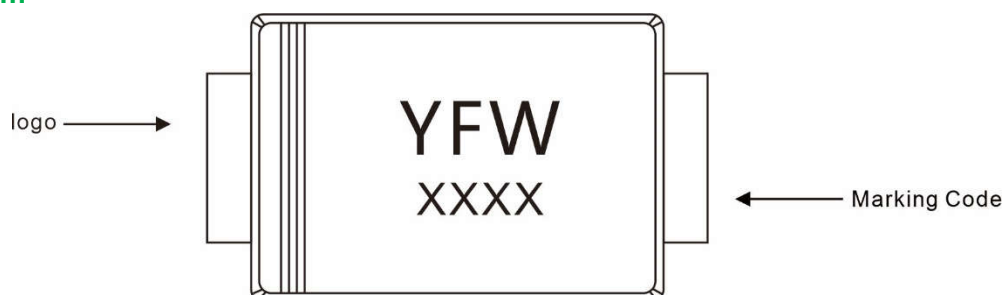

Ordering information


Package	Packing Description	Packing Quantity
DO-214AB SMC	Tape/Reel, 13" reel	3000PCS/Reel 30000PCS/Carton

Package Dimensions

DO-214AB SMC

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	2.00	2.62	79	103
E	6.5	7.0	256	276
D	5.6	6.2	220	244
E ₁	7.6	8.0	299	315
A ₁	0.05	0.21	2.0	8.3
C	0.15	0.31	5.9	12
L	0.9	1.6	35	63
b	2.75	3.25	108	128

The recommended mounting pad size

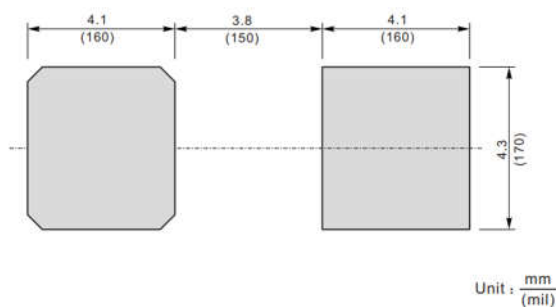

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.