


PNP Silicon Epitaxial Planar Transistor

FEATURES

- ◆Case: SOT-89
- ◆Low collector-emitter saturation voltage V_{CEsat}
- ◆High collector current capability: I_C and I_{CM}
- ◆Higher efficiency leading to less heat generation
- ◆Reduced printed-circuit board requirements.

APPLICATIONS

- ◆Power management
 - DC/DC converters
 - Supply line switching
 - Battery charger
 - LCD backlighting

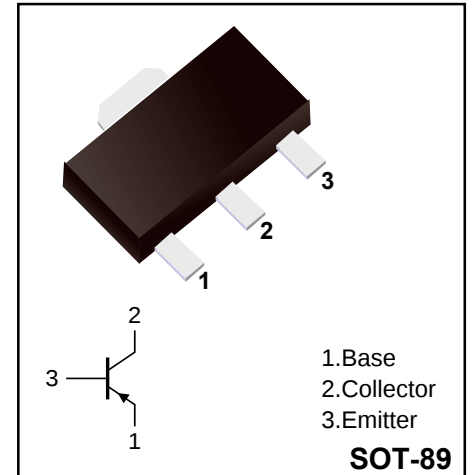

Marking Code	
PBSS5350SI	S46

Limiting Values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Conditions	Symbol	Value	Unit
collector-base voltage	open emitter	V_{CB0}	-50	V
collector-emitter voltage	open base	V_{CEO}	-50	V
emitter-base voltage	open collector	V_{EB0}	-5	V
collector current (DC)	note 4	I_C	-3	A
peak collector current	limited by $T_{j(max)}$	I_{CM}	-5	A
base current (DC)		I_B	-0.5	A
total power dissipation	$T_{amb} \leq 25^\circ C$ note 1 note 2 note 3 note 4	P_{tot}	550 1 1.4 1.6	mW W W W
storage temperature		T_{stg}	-65 +150	$^\circ C$
junction temperature		T_j	150	$^\circ C$
ambient temperature		T_{amb}	-65 +150	$^\circ C$

Notes

- 1.Device mounted on a FR4 printed-circuit board; single-sided copper; tin-plated; standard footprint.
- 2.Device mounted on a FR4 printed-circuit board; single-sided copper; tin-plated; mounting pad for collector 1 cm².
- 3.Device mounted on a FR4 printed-circuit board; single-sided copper; tin-plated; mounting pad for collector 6 cm².
- 4.Device mounted on a ceramic printed-circuit board 7 cm², single-sided copper, tin-plated.

CHARACTERISTICS

Tamb = 25°C unless otherwise specified.

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
collector-base cut-off current	$V_{CB} = -50\text{ V}; I_E = 0\text{ A}$	I_{CBO}			-100	nA
	$V_{CB} = -50\text{ V}; I_E = 0\text{ A}; T_j = 150^\circ\text{C}$				-50	A
collector-emitter cut-off current	$V_{CE} = -50\text{ V}; V_{BE} = 0\text{ V}$	I_{CES}			-100	nA
emitter-base cut-off current	$V_{EB} = -5\text{ V}; I_C = 0\text{ A}$	I_{EBO}			-100	nA
DC current gain	$V_{CE} = -2\text{ V}$ $I_C = -0.1\text{ A}$ $I_C = -0.5\text{ A}$ $I_C = -1\text{ A}; \text{note 1}$ $I_C = -2\text{ A}; \text{note 1}$ $I_C = -3\text{ A}; \text{note 1}$	h_{FE}	200 200 200 130 80		450	
collector-emitter saturation voltage	$I_C = -0.5\text{ A}; I_B = -50\text{mA}$	$V_{CE(sat)}$			-90	mV
	$I_C = -1\text{ A}; I_B = -50\text{mA}$				-180	mV
	$I_C = -2\text{ A}; I_B = -100\text{mA}$				-320	mV
	$I_C = -2\text{ A}; I_B = -200\text{mA}; \text{note 1}$				-270	mV
	$I_C = -3\text{ A}; I_B = -300\text{mA}; \text{note 1}$				-390	mV
equivalent on-resistance	$I_C = -2\text{ A}; I_B = -200\text{mA}; \text{note 1}$	$R_{CE(sat)}$			135	m
base-emitter saturation voltage	$I_C = -2\text{ A}; I_B = -100\text{mA}$	$V_{BE(sat)}$			-1.1	V
	$I_C = -3\text{ A}; I_B = -300\text{mA}; \text{note 1}$				-1.2	V
base-emitter turn-on voltage	$V_{CE} = -2\text{ V}; I_C = -1\text{ A}$	$V_{BE(on)}$			-1.1	V
transition frequency	$I_C = -100\text{ mA}; V_{CE} = -5\text{ V}; f = 100\text{ MHz}$	f_T	100			MHz
collector capacitance	$V_{CB} = -10\text{ V}; I_E = I_C = 0\text{ A}; f = 1\text{MHz}$	C_C			35	pF

1. Pulse test: $t_p \leq 300\text{ }\mu\text{s}; \delta \leq 0.02$.

Electrical Characteristic Curve

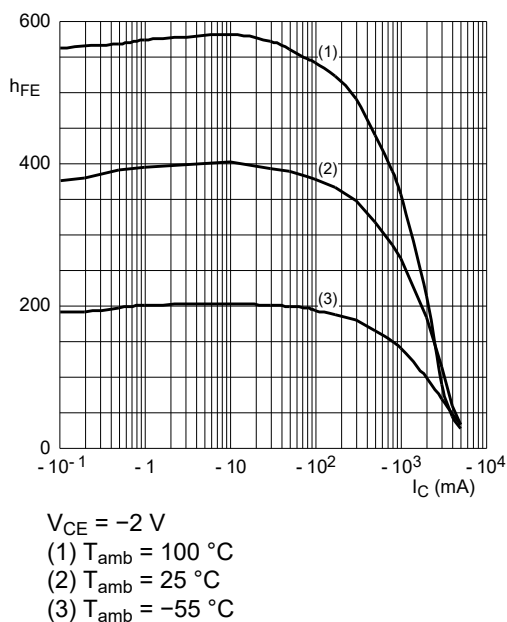


Fig.1 DC current gain as a function of collector current; typical values.

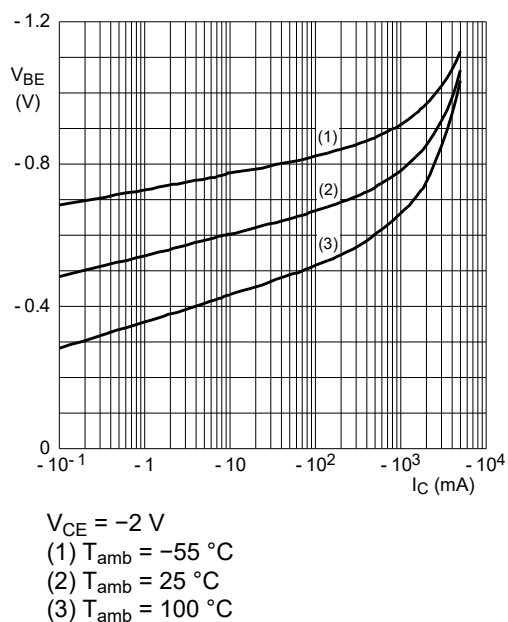


Fig.2 Base-emitter voltage as a function of collector current; typical values.

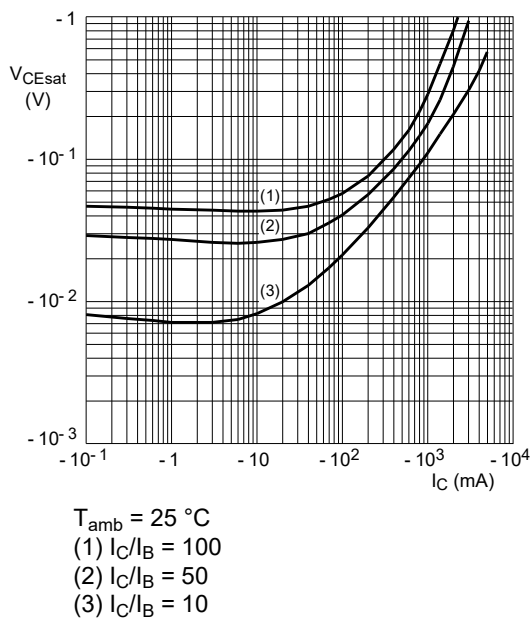


Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

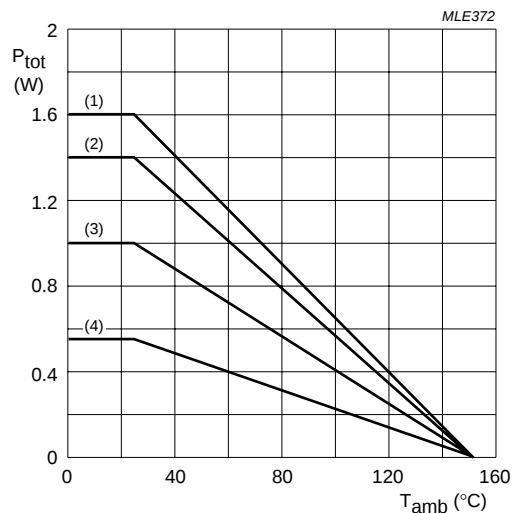


Fig.4 Power derating curves.

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

The recommended mounting pad size

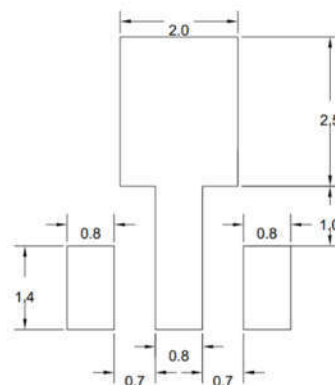

UNIT:MM

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.