

**Fast Recovery High Voltage Diodes**

**Reverse Voltage –15KV**

**Forward Current –200mA**

**FEATURES**


- ◆Supersmall size
- ◆High reliability
- ◆High speed switching

**Applications**

Rectification for high voltage power supply of color T.V、 CRT display、 V.T.R camera and Others

**MECHANICAL DATA**

- ◆Case: DO-308
- ◆Epoxy meets UL 94V-0 flammability rating
- ◆Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201 class 1A whisker test.
- ◆Polarity: Color band denotes cathode end

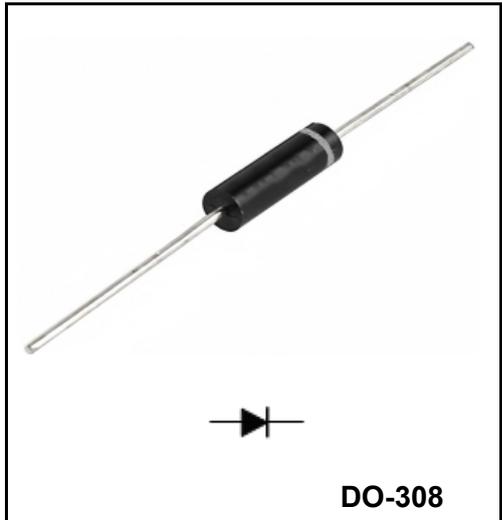


**Maximum rating (Ta=25°C unless otherwise noted)**

Parameter		Symbols	UX-F15	Units
Repetitive peak reverse voltage		$V_{RRM}$	15	KV
Non-Repetitive peak reverse voltage		$V_{RMS}$	16	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta=25°C	$I_{F(AV)}$	200	mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1cycle, Ta=25°C	$I_{FSM}$	15	A
Peak forward voltage	$I_{FM}=200mA$	$V_{FM}$	20	V
Peak reverse current $V_{RM}=V_{RRM}$	Ta=25°C	$I_{RRM}$	2	μA
	Ta=100°C		5	
Reverse recovery time	$I_F=2mA, I_{RM}=4mA$	$t_{rr}$	0.1	μs
Operating ambient temperature		Ta	-40 ~ +100	°C
Storage Temperature Range		Tstg	-40 ~ +120	°C
Virtual junction temperature		T(vj)	120	°C


Typical characteristics

**Reverse Recovery Measurement Waveform**

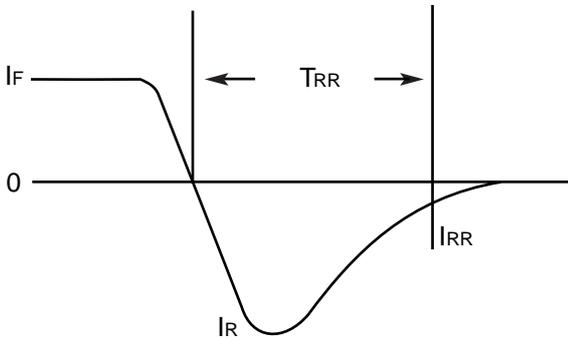


Typical data capture points:  $I_F = 0.5I_R$ ,  $I_R, I_{RR} = 0.25I_R$   
 $I_R$  is typically the rated average forward current maximum ( $I_{FVM}$ ) of the D.U.T.

**Forward Current Derating Curve**

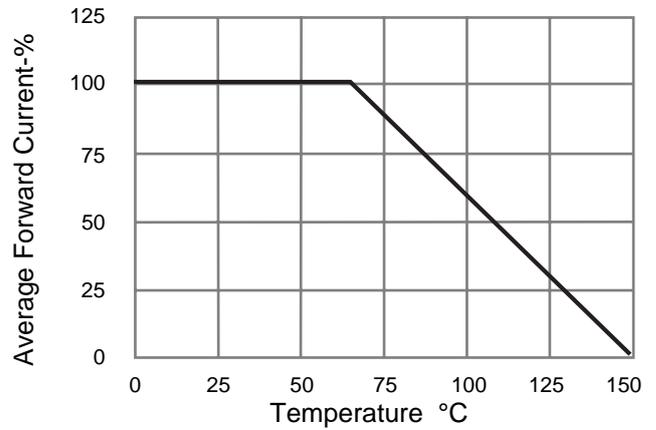


— 150 °C (All other part number)


**Positive Characteristic Curve**

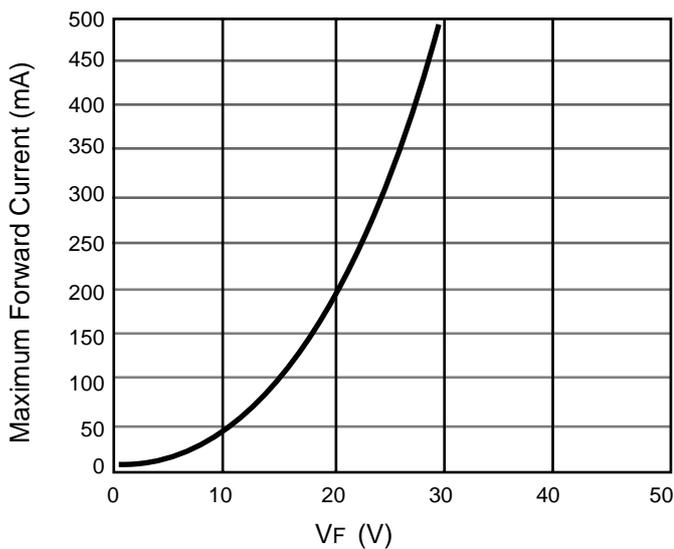

**Reverse Leakage Current Curve With Voltage Variation**

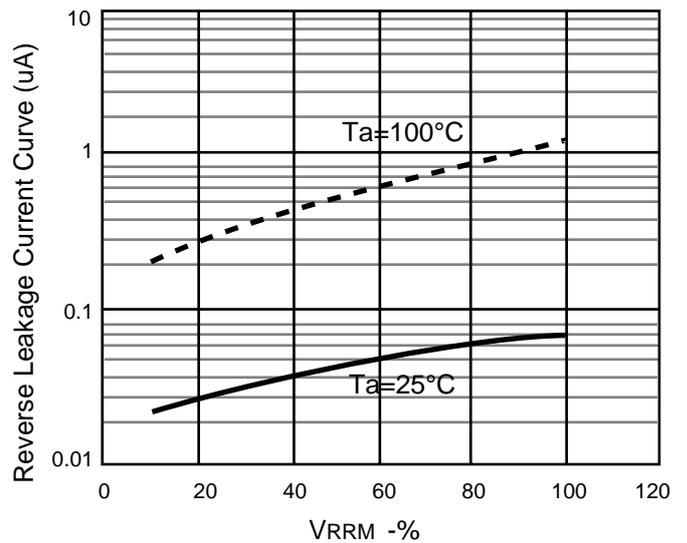

**Repetitive Surge Current Derating Curve**

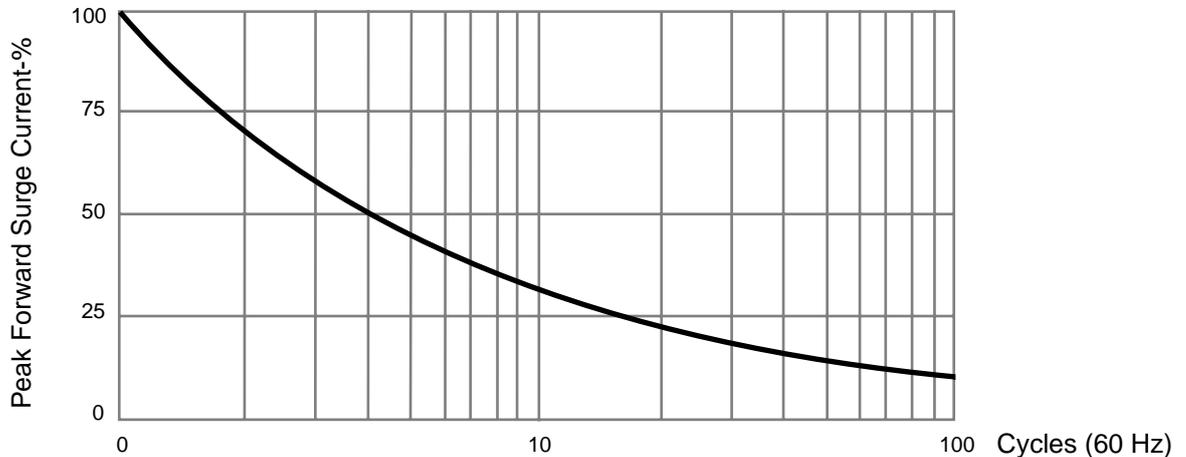

This curve represents the percentage of published maximum surge rating as a function of surge repetition.


Note: Specifications subject to change without notice. Photo is representation only.

**Ordering information**

Package	Packing Description	Packing Quantity
DO-308	braid	2500PCS/Box 25000PCS/Carton

**Package Dimensions(Millimeter(mm))**

**DO-308**

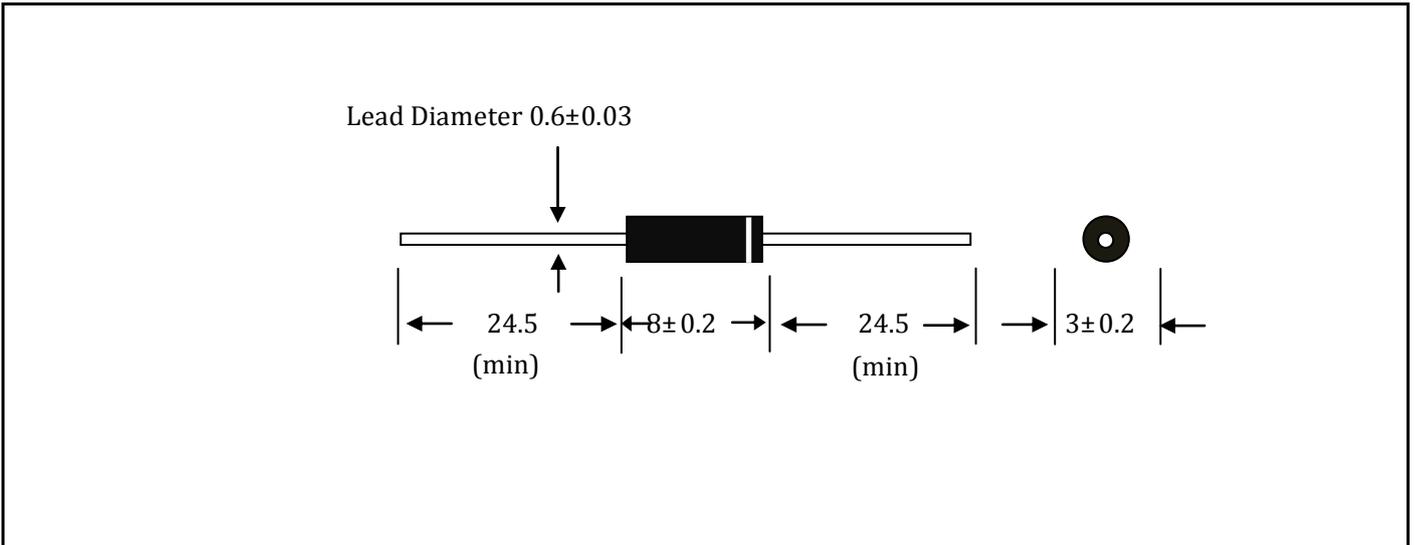

## Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.