


**Fast recovery high voltage diodes**

**FEATURES**

- ◆ Supersmall size
- ◆ High reliability
- ◆ High speed switching

**MECHANICAL DATA**

- ◆ Case: Molded Plastic Body
- ◆ Epoxy meets UL 94V-0 flammability rating
- ◆ Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201 class 1A whisker test.
- ◆ Polarity: Color band denotes cathode end

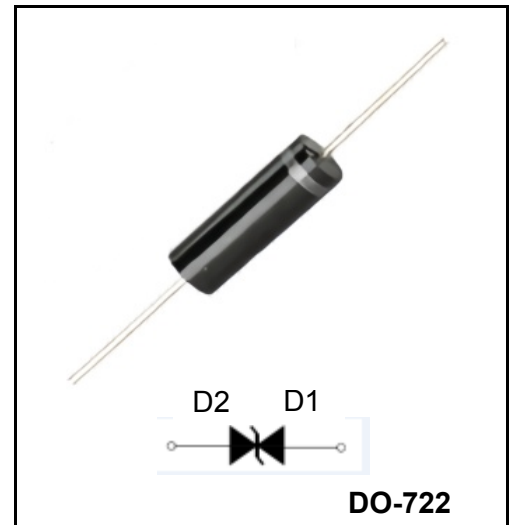

**Maximum rating (Ta=25°C unless otherwise noted)**


Item	Symbol	2CLS01		2CLS02		2CLS03		Unit
		D1	D2	D1	D2	D1	D2	kV
Repetitive peak reverse voltage	$V_{RRM}$	6	1.7	6	1.5	6	1.3	kV
Avalanche Breakdown voltage	$V_{(BR)}$	$\geq 7$	2.1-2.8	$\geq 7$	1.8-2.4	$\geq 7$	1.5-2.1	kV
Peak reverse current	$I_{RRM}$	10						$\mu A$
Storage Temperature Range	$T_{stg}$	-40 ~ +130						°C
Virtual junction temperature	$T_{(vj)}$	130						°C

Ordering information

Package	Packing Description	Packing Quantity
DO-722	bulk	100PCS/Bag 500PCS/Box 4000PCS/Carton

Package Dimensions(Millimeter(mm))

DO-722

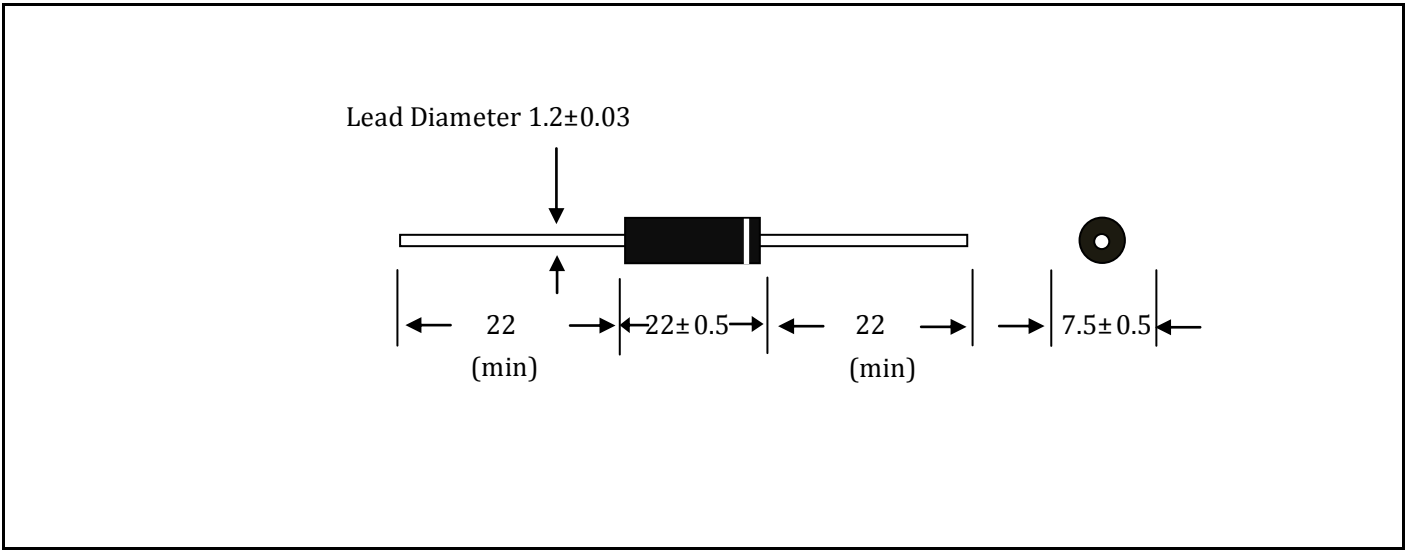

## Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.